

**PLAN**


**NOTES:**

BRICK MASONRY CAN BE COMMON CLAY BRICK, JUMBO BRICK, OR CONCRETE BRICK.

CONCRETE BOTTOMS SHALL BE PAID AS BRICK MASONRY.

ALL MORTAR JOINTS ARE TO BE 1/2" + 1/8".

FOR DEPTHS OVER 3'-6" USE STEPS ON 16" CENTERS. STEPS SHALL BE IN ACCORDANCE WITH COG STD. #414.

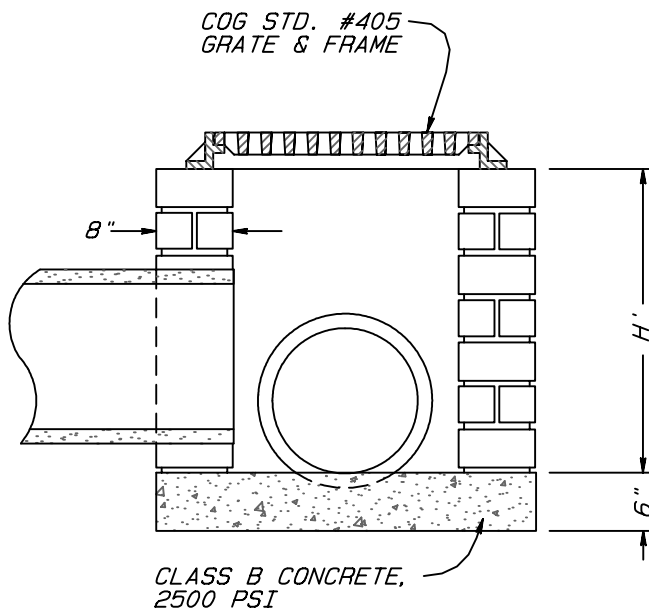

**SECTION A-A**

**QUANTITIES**

BASE (C. Y.)	H' (PER FT. HEIGHT)
0.190	0.242

**DEDUCTIONS FOR ONE PIPE**

PIPE SIZE	C. M.	R. C.
12"	0.020	0.032
15"	0.031	0.047
18"	0.044	0.065

**C I T Y O F G R E E N S B O R O**

**STANDARD BRICK MASONRY DROP  
INLET 20" X 26" GRATE**

**STD. NO.**

**409**

**REV.**

09-95  
08-02